


AUBO-iS10

iS SERIES

COLLABORATIVE ROBOT

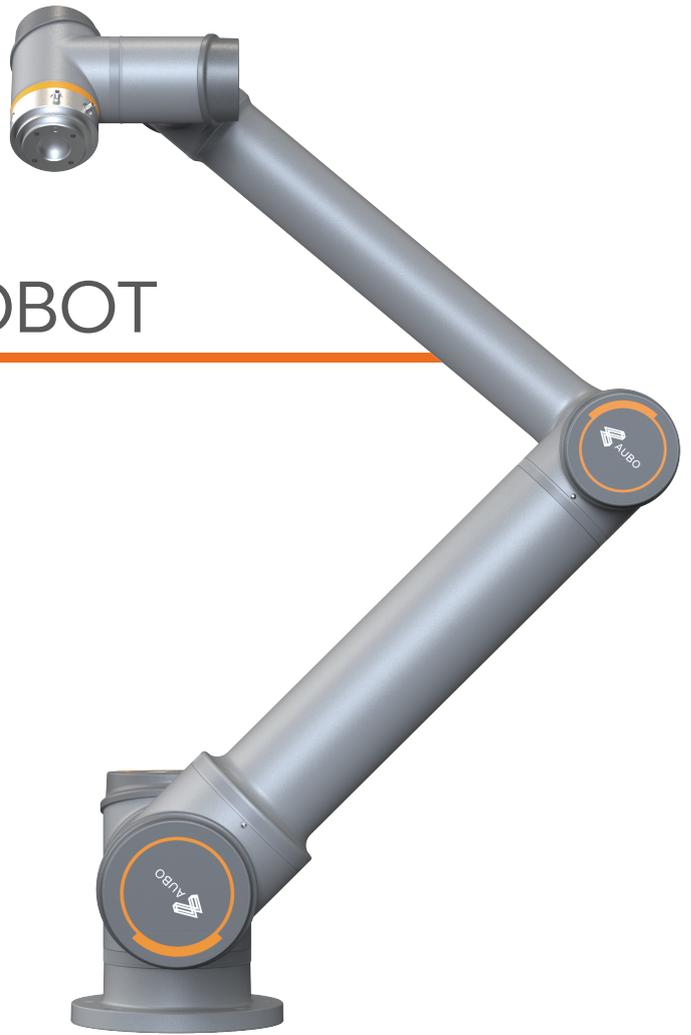

 **10KG**
Payload

 **36KG**
Weight

 **±0.03mm**
Repeatability

 **1300mm**
Reach

- ✓ The AUBO-iS10 high-performance collaborative robot features a high-speed arm operation, meeting the working requirements of complex and sensitive environments.
- ✓ It has a payload of 10 kg and offers a reach span of 1457mm and a maximum working radius of 1300mm.
- ✓ Designed for high performance, rapid response, and compact, lightweight convenience.

Application Fields


The iS-series is suitable for a wide range of industry scenarios and is particularly suited for precision manufacturing, spraying, and other specialized applications in harsh and sensitive environments.




Product Advantages

- 01 **Modular Design, Easy to Replace** AUBO iS-series cobots feature an integrated modular design with six standard modules of different specifications, allowing for quick replacement and more convenient maintenance and repair.
- 02 **Enhanced Performance, Precision and Efficiency** Compared to the previous generation, there is an overall improvement in repeatability accuracy, absolute accuracy, and path accuracy, with the robot arm operating at a higher speed.
- 03 **New Design, Higher Protection Level** The highest load-to-self-weight ratio can reach 1:3.2. Core components have been optimized with new control algorithms; the fully enclosed structure allows for a maximum protection level of IP68.
- 04 **Compact and Flexible, Wide Application** The new teaching pendant weighs only 1kg, and the floor space of the new control cabinet is reduced by 50%; it comes standard with a multifunctional tool end, enabling a broader range of applications.




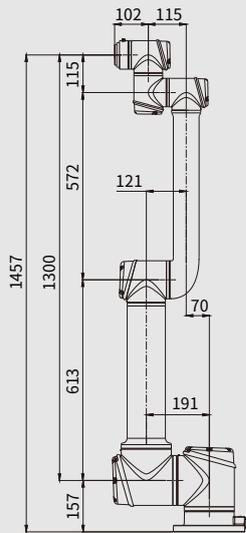


AUBO-iS10 Dimensions

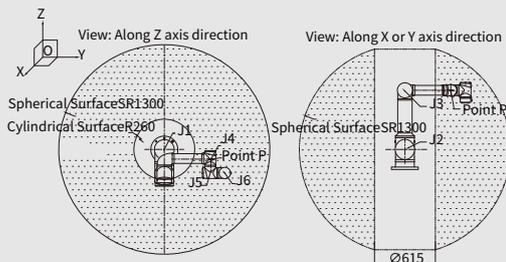

AUBO-iS10 Moving Range of Point P

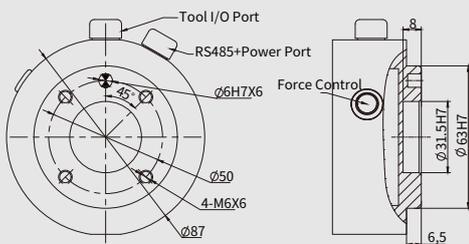


AUBO-iS10 Tool End Flange

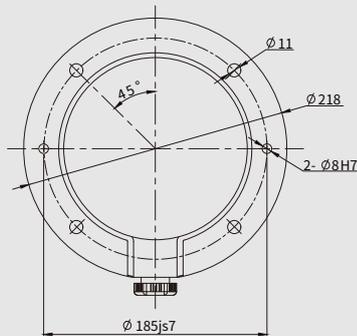

AUBO-iS10 Top View of Base

Robot

Degrees of Freedom	6
Reach (mm)	1300
Payload (kg)	10
Weight (kg)	36
Mounting Surface Diameter (mm)	Ø218
Repeatability (mm)	±0.03
Linear Velocity (m/s)	≤4.0
Average Power(W)	500
Peak Power (W)	2000
Ambient Temperature (°C)	0-50
Ambient Humidity	90% RH (Non-condensing)
Installation Orientation	Any ceiling, Floor, Wall
IP Classification	IP67, up to IP68
ISO 14644-1 Cleanliness Class	5

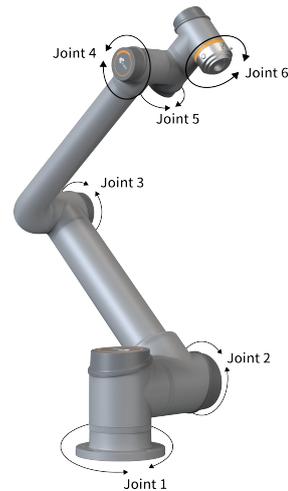

Axis Movement

	Working Range (°)	Maximum Speed (°/s)
joint 1	±360	178
joint 2	±360	178
joint 3	±167	237.6
joint 4	±360	296.3
joint 5	±360	296.3
joint 6	±360	296.3

*Each joint has the ability of ±360°, but limited by the application scenario, part of the joints may not be reached.

Control Box

Model	AUBO-IS-CB-M
Size (L*W*H)	400mm*160mm*320mm
Weight	12.5kg
Cable Connecting Robot	5m (customizable, up to 8m)
Cable Connecting Pendant	4m
Cable Connecting Power	5m
Communication	Ethernet, ModBus-RTU/TCP; EtherCAT, EtherNet/IP, Profinet (Optional)
Interface	SOK (Support C/C++/C#/Lua/Python), Support ROS, API
Incremental Encoder	Encoder line count range: 1500-10000 CPR. Speed range: 0-3000 RPM
Power Supply	100-240VAC, 50-60Hz
IP Classification	IP43



Control Box I/O, Tool I/O

		Control Box	Tool
I/O Port	Digital In	8 (general) / 8 (safe)	4 (optional)
	Digital Out	8 (general) / 8 (safe)	4 (optional)
	Analog In	2	2
	Analog Out	2	-
	RS485	1	1
I/O Power	Output Voltage	24V	0V/12V/24V
	Output Current	2A	Rated 2A/Peak 3A

Teach Pendant

Model	AUBO-TP
Dimensions	254mm*213.1mm*40.8mm
Weight	1.0kg
IP Classification	IP43
Colors	Orange + black



Disclaimer

1. The content of this product catalog is subject to change without prior notice.
 2. This product catalog is an original work of our company and all copyrights belong to us. Please cite the source when reprinting or quoting content from this catalog. Unauthorized reproduction is prohibited and will be considered an infringement, for which legal liability will be pursued according to law.